DESCRIPTION

Miniature cylindrical recessed housing and round trim with smooth regressed splay and 45° cut-off. Includes enclosure with integral transformer and wiring compartment.

For new construction or remodel applications. Insulation must be kept 3" from all sides and at least 1" above the housing.

Catalog #		**Type**
Project		
Comments		**Date**
Prepared by		

SPECIFICATION FEATURES

A ...Housing
All aluminum construction with 18" of flexible conduit attached to a cylindrical transformer/wiring enclosure. Swing out mounting clips form pressure fit for mounting in 1/2" - 3/4" drywall.

B ...Trim:
3.5" o.d. round trim with smooth regressed splay and 45° cut-off. Finished in white, black, industrial silver, stainless steel (painted), and custom colors.

C ...System Protection:
Thermal protection inside housing. Vent holes in housing provide cooler operation. All aluminum construction provides overall reduced temperatures.

D ...Electrical
Electronic or magnetic transformer housed in a separate metal enclosure. Enclosure includes a separated wiring compartment and entry for primary leads.

E ...Lamp
12V MR16 or MR16 IRC 20 watts max. (not included). "POSI-GRIP" bi-pin lamp socket for firm, mechanical lamp connection. Can accept up to two (2) optical accessories.

Ceiling Cut-Out: 3.19" dia.

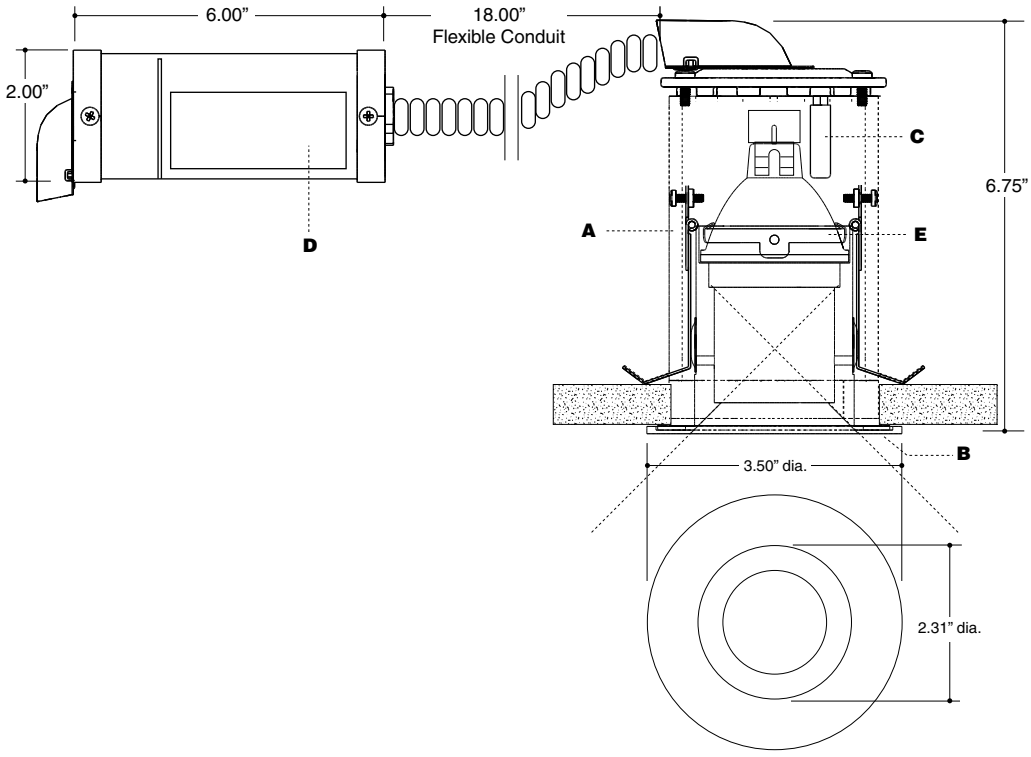



LYNX

LX3004
Miniature Round Trim w/ Smooth Regressed Splay 45° Cut-Off

Cylindrical Housing Transformer/Wiring Enclosure

12V MR16 20 watts max.

12V MR16-IRC 20 watts max.

c UL us

U.L. Listed. Suitable for use in combustible ceilings.

ORDERING INFORMATION

LX3004			

Fixture
LX3004
Regressed Lynx Trim with Smooth Regressed Splay, 45° Cut-Off & Housing & Transformer Enclosure

Finish
WH = White
BK = Black
S = Industrial Silver
SS = Stainless Steel (painted)
PM = Primer

Transformer
ELC = Electronic
MAG = Magnetic

Voltage
120 = 120 volts
277 = 277 volts